




# Dyson Ball Animal Power Cord Replacement

This is a step by step guide for the replacement of a broken power cord on the Dyson Ball Animal.

Written By: Jonathan Gong-Guy

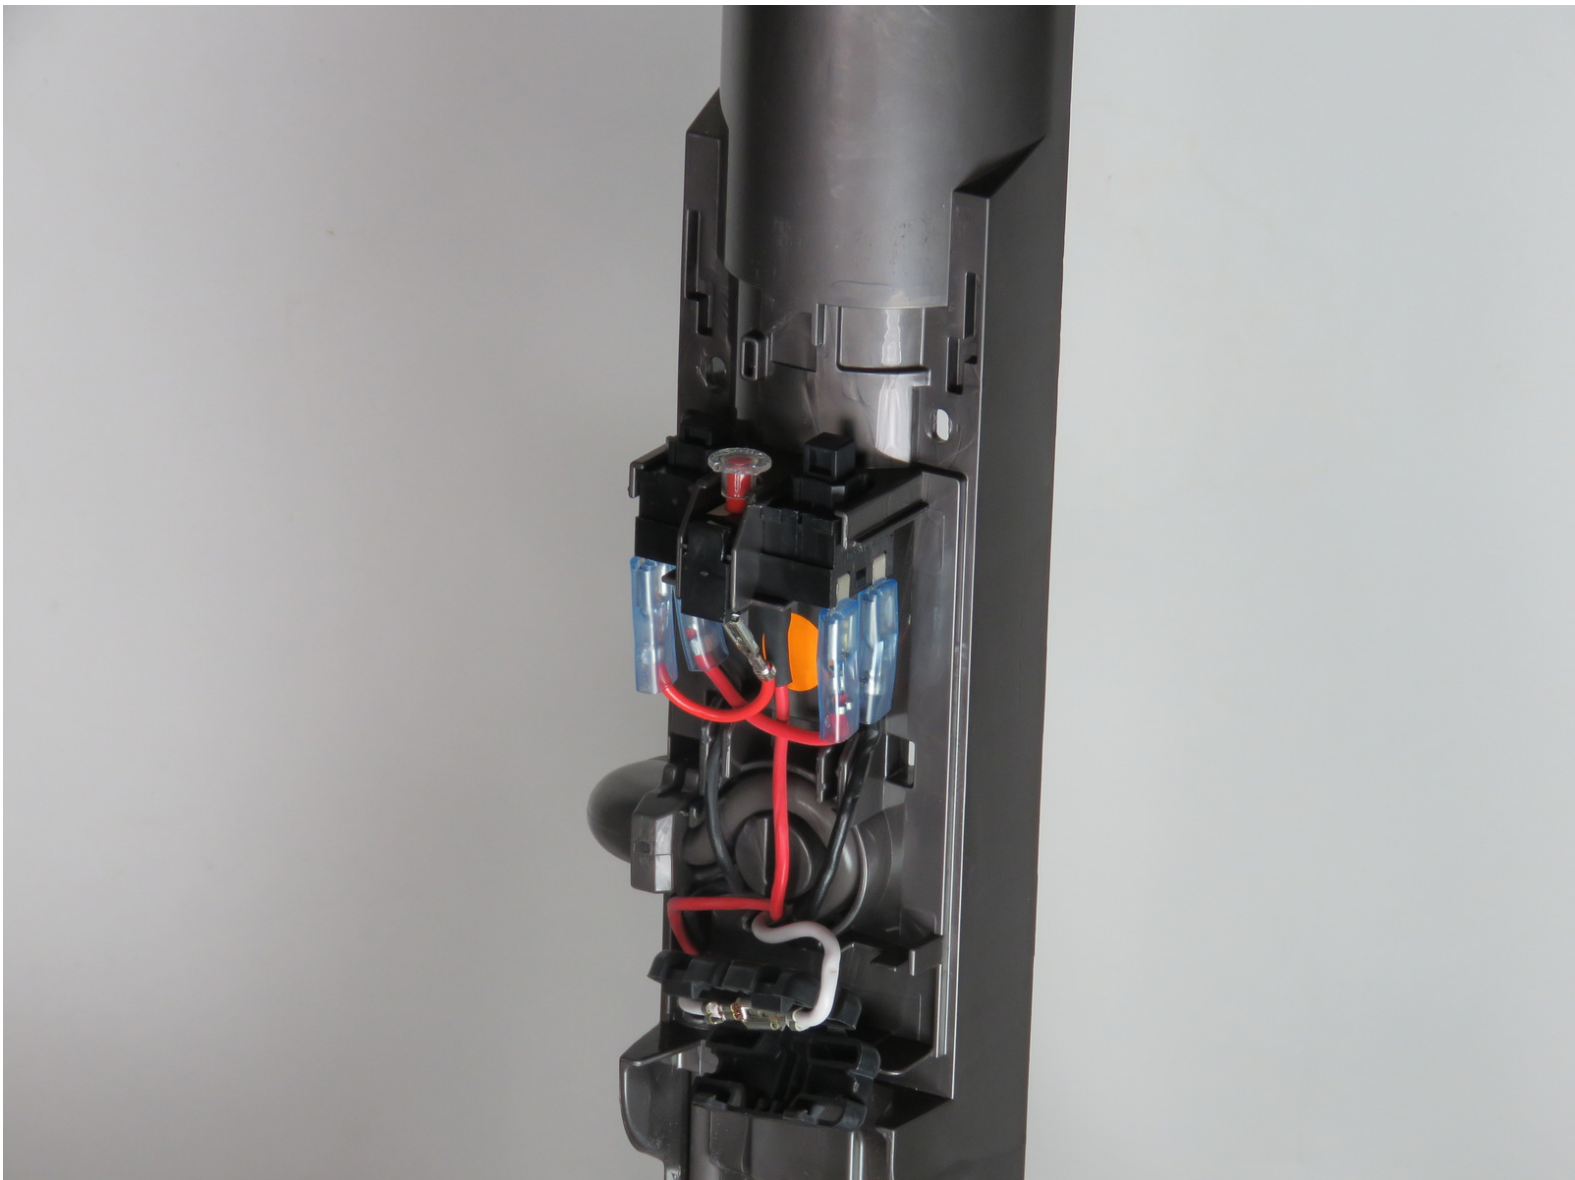

## INTRODUCTION

In this guide you will be able to remove the cover on the power cord and remove and reattach the power cord for the Dyson Ball Animal.


---



### TOOLS:

- [T15 Torx Screwdriver](#) (1)
-

## Step 1 — Power Cord

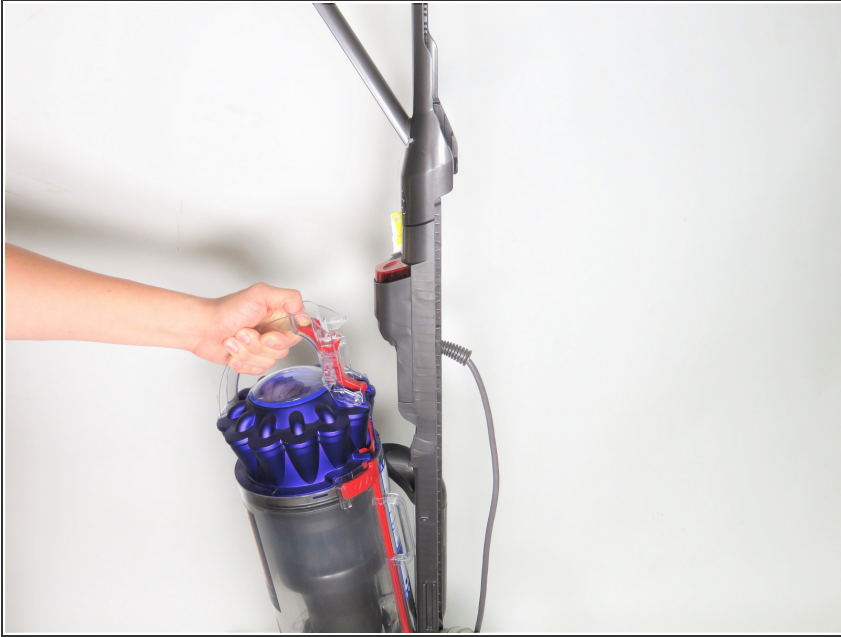


- Turn off and unplug the vacuum.
- Remove the vacuum canister from the front of the vacuum.

## Step 2




- Flip the vacuum around and remove the hose so it is not blocking the back of the vacuum.

## Step 3

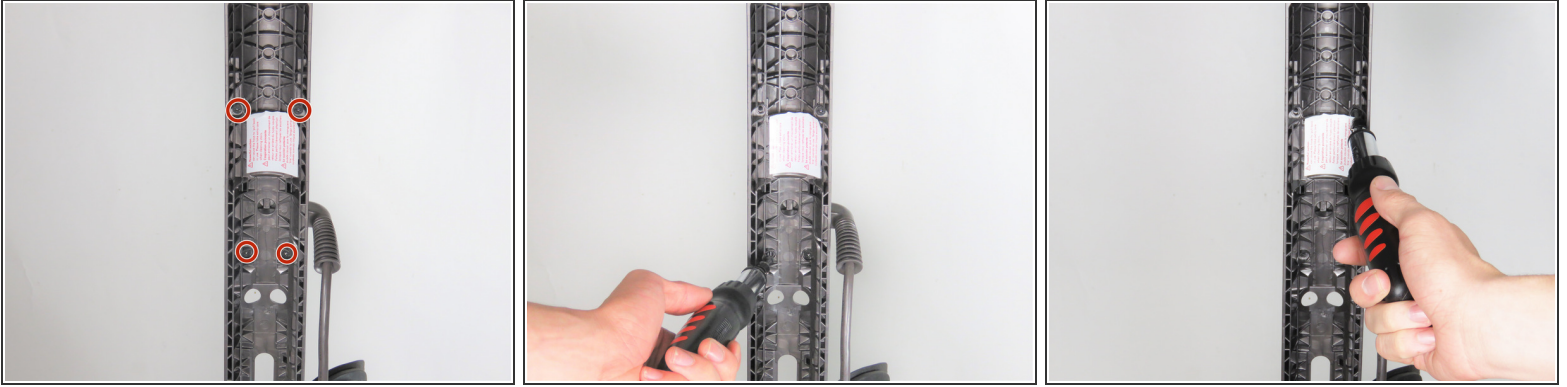


- There are four 15mm screws that must be removed with a Torx T15 screwdriver.

## Step 4


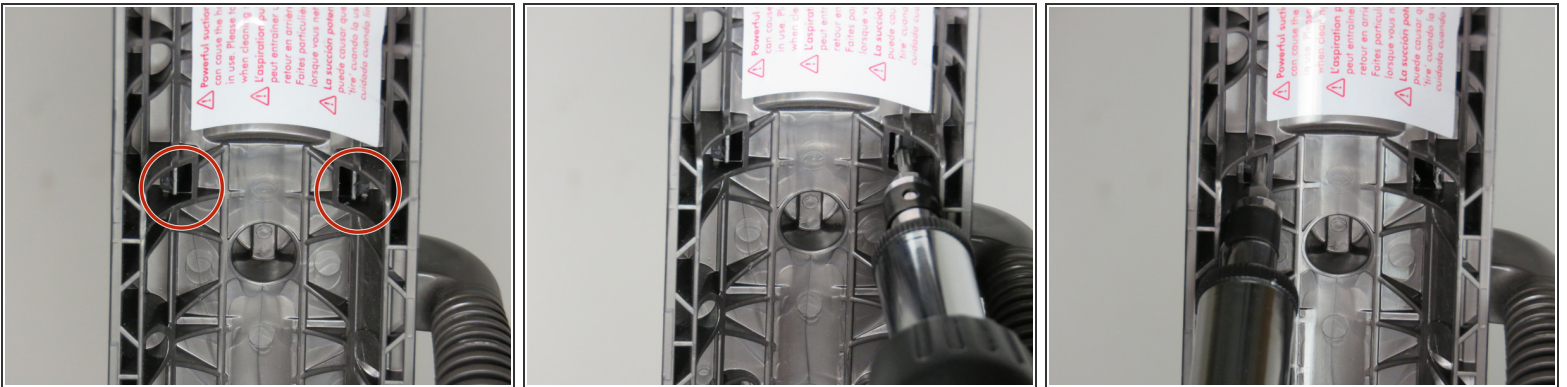


- After all the screws are released there are two tabs that must be pressed in and towards the center.

 The tabs can be pressed in one at a time but may require some force.



## Step 5

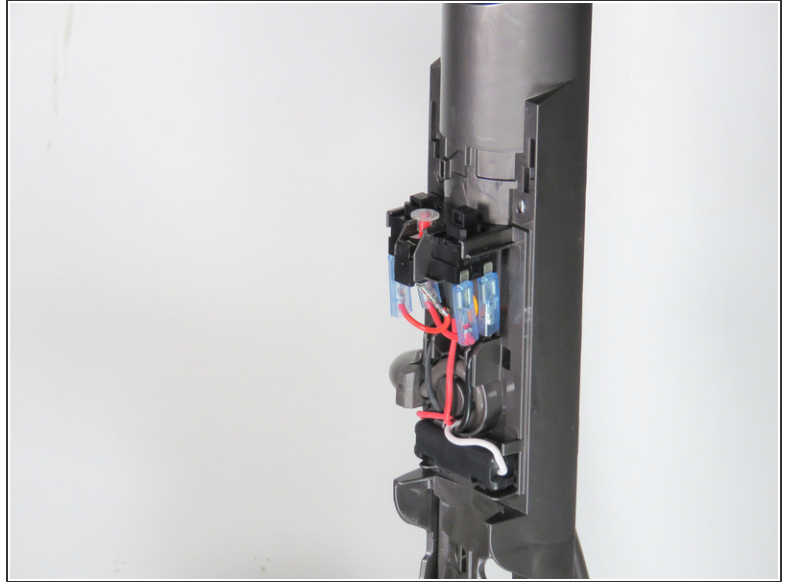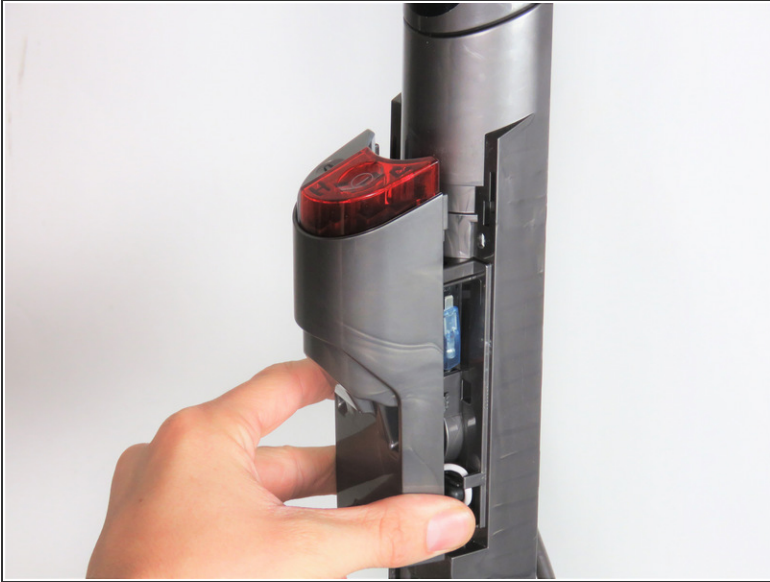


- After removing the two tabs gently pull the face off the power supply.


## Step 6



- Follow the black cord from the power cord.
- Pinch the plastic piece.
- Remove from the metal tongue.

 When removing the cords, grab them from the plastic parts and not the cord.

## Step 7

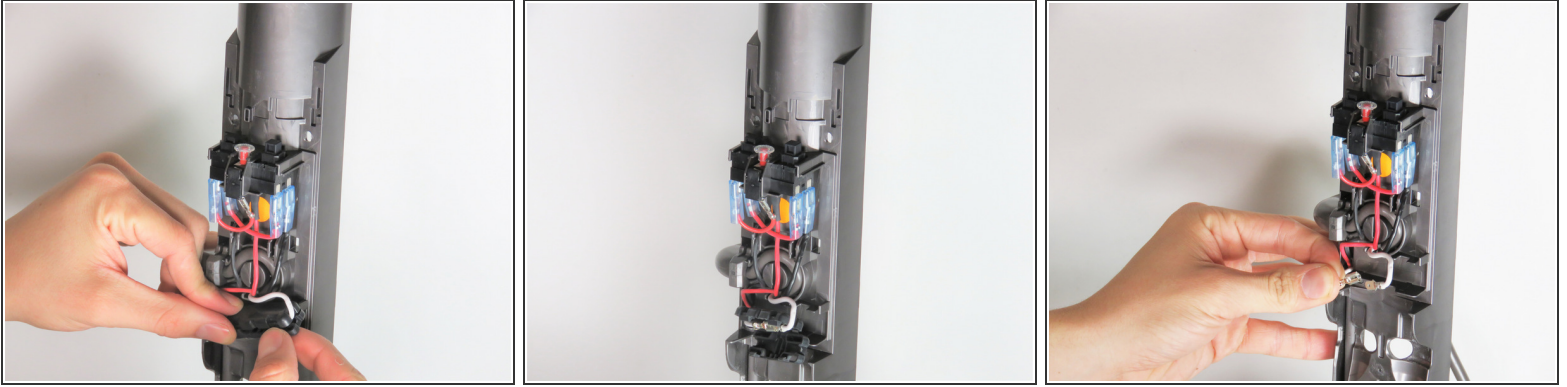

- There is also a black case that needs to be opened in order to remove the power cord.
  - After opening the case pull apart the wire and attach the new wire.
- ⚠ Again, make sure that you are pulling from the heads of the wires and not the wires themselves.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-14 03:13:58 AM.